
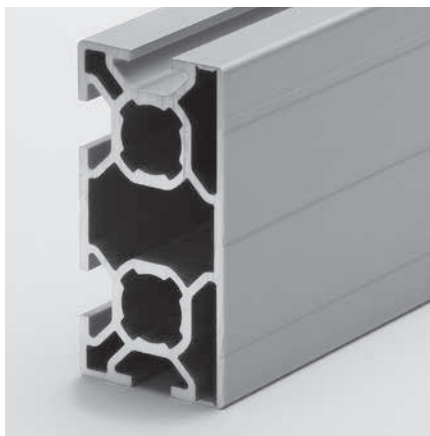


30x50 face extrusion with panel slots type MB1-9

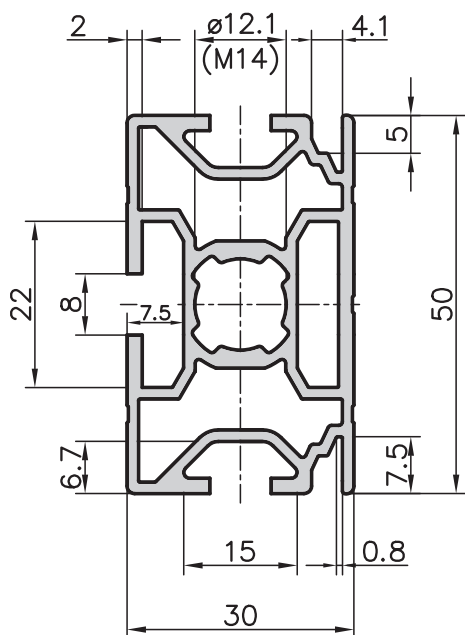

Application


The narrow slots hold panels measuring up to 4 mm in thickness securely and firmly in place. Therefore, this extrusion is ideal in any application where covers and cladding of various types are being fitted.

Technical data



I_x	=	11.25 cm ⁴
I_y	=	4.84 cm ⁴
W_x	=	4.50 cm ³
W_y	=	3.23 cm ³
Cross-section area	=	5.00 cm ²
Weight	=	1.3 kg/m

Order data Order number

30x50 face extrusion with panel slots	
Standard length 5000 mm	MB1-9-00/5000
30x50 face extrusion with panel slots	
Cut to length	MB1-9-02-02/...
Extra machining	Pages 57-61

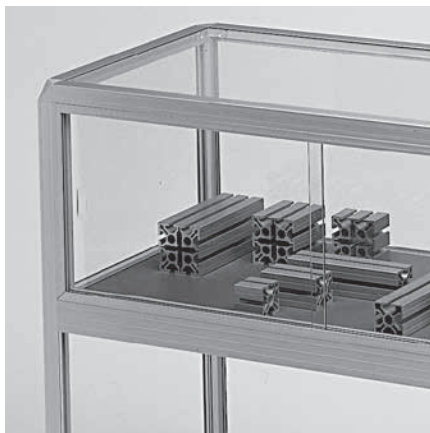

30x60 face extrusion with panel slots type B03-6

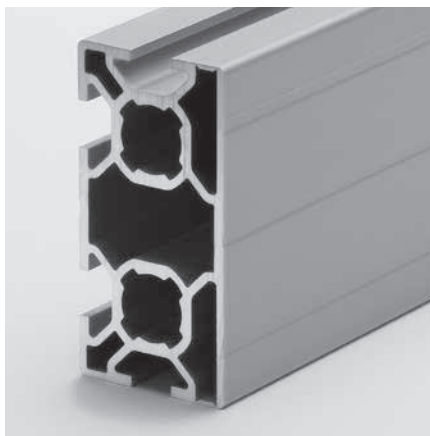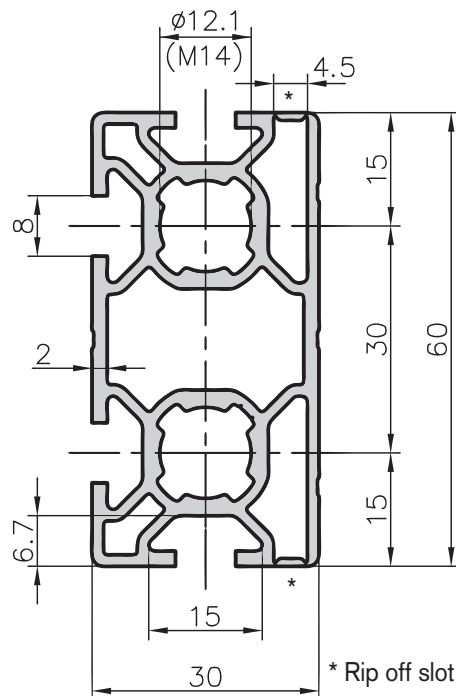

Application

With the same function as the extrusion type MB1-9 but with the difference being that the small slots have to be opened if they are required.

Technical data

I_x	=	19.33 cm ⁴
I_y	=	5.43 cm ⁴
W_x	=	6.44 cm ³
W_y	=	3.60 cm ³
Cross-section area	=	5.48 cm ²
Weight	=	1.5 kg/m

Order data Order number

30x60 face extrusion with panel slots	
Standard length 5000 mm	B03-6-00/5000
30x60 face extrusion with panel slots	
Cut to length	B03-6-02-02/...
Extra machining	Pages 57-61