



Corner extrusion 30x60 type B02-5

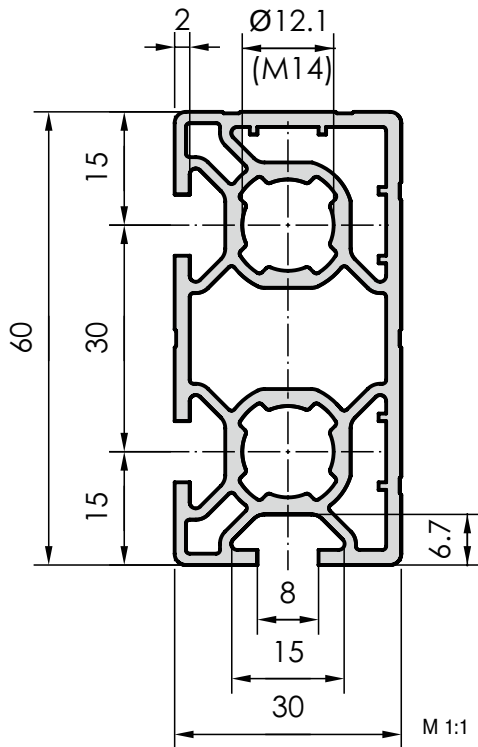


60x60 base extrusion type B02-6

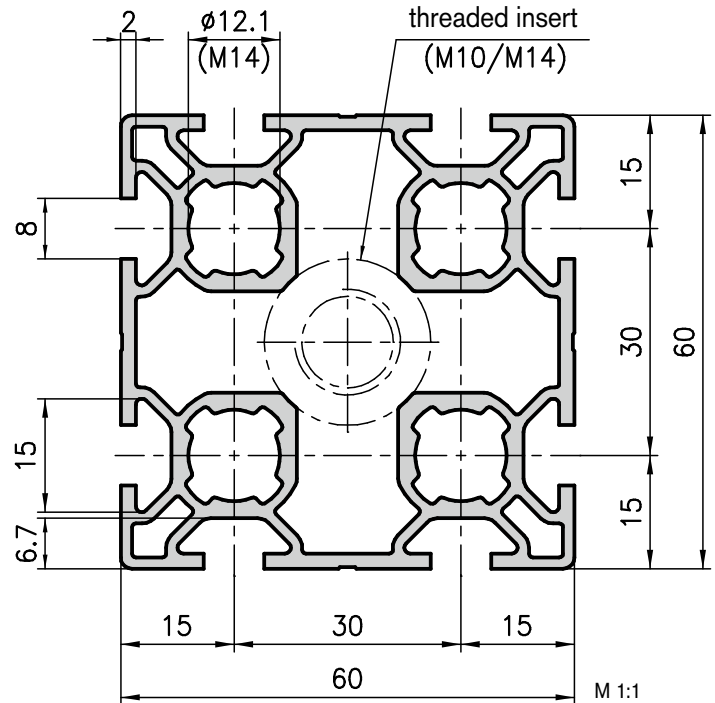

Application

Corner extrusions are suitable for machine frames, guards, safety partitions and much more.

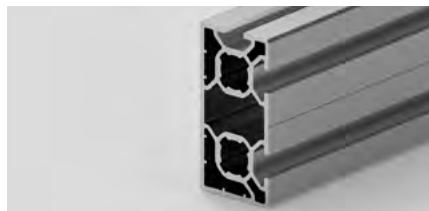

Application

Mainly used as a brace. Levelling feet and castors can be attached using the threaded inserts B33-60 or B33-64 (page 159).

Technical data

I_x	=	5.92 cm ⁴
I_y	=	21.73 cm ⁴
W_x	=	7.24 cm ³
W_y	=	3.946 cm ³
Cross-section area	=	5.90 cm ²
Weight	=	1.6 kg/m
Alloy	=	EN AW-6063

Order data Order number

Corner extrusion 30x60	
Standard length 5000 mm	B02-5-5M
Corner extrusion 30x60	
Cut to length	B02-5-02-02/...



Technical data

$I_{x,y}$	=	35.83 cm ⁴
$W_{x,y}$	=	11.94 cm ³
Cross-section area	=	9.04 cm ²
Weight	=	2.4 kg/m
Alloy	=	EN AW-6063

Order data Order number

60x60 base extrusion	
Standard length 5000 mm	B02-6-5M
60x60 base extrusion	
Cut to length	B02-6-02-02/...
Insert M10	B33-60
Insert M14	B33-64

Extra machining

Pages 43-47