


Cable duct connector

Application


The connectors are used to extend the cable ducts and create a 90° mitred connection (other angles on request). 2 connectors are required for the aluminium cable ducts 40x80 and 80x80. The threaded pins used to fix the ducts are included with the parts supplied.

Specification: zinc-coated steel

Adjusting screws: M5

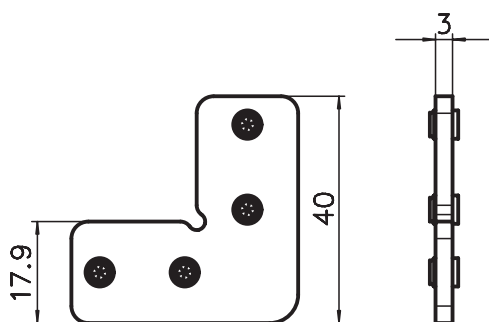

Connector, straight

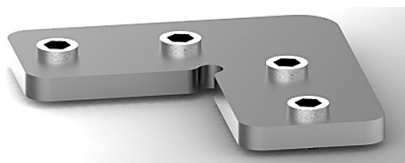


Connector, 90°, other angles on request

Order data	Order number
Connector, 90°	C38-90
Connector, straight	C38-91

Covering cap for front cover

Application

The covering cap is used to cover unnecessary openings on the front plates.

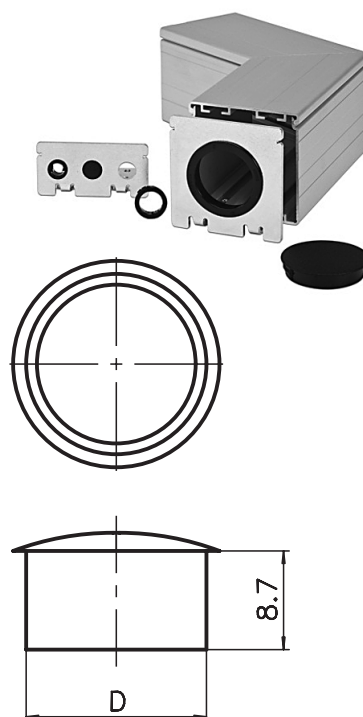


Plastic, black

Order data	Order number
Ø 16	C38-46
Ø 20	C38-47

Cable passage to front cover

Application

This edge protection is used at places where cables need to be fed through the cable duct on the front face. Available for the relevant holes in the front covers.

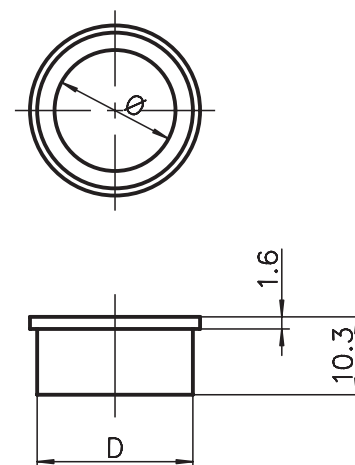

Plastic, black

Order data	Order number
D= 16 Ø 12.7	C38-56
D= 20 Ø 16	C38-57