


## Attachment bracket

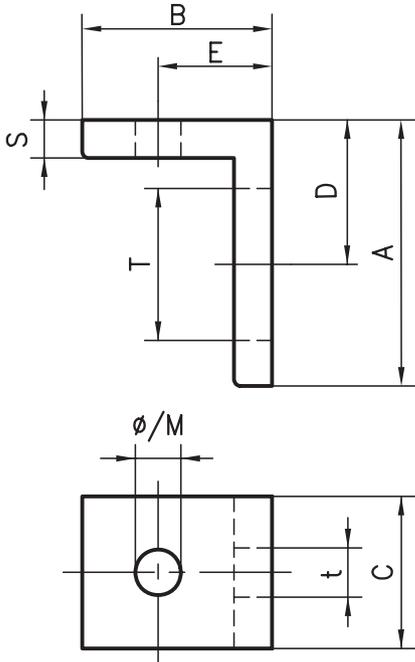

### Application


The fixing angle is used to mount additional equipment, panelling, work tops, valves, electrical switchgear, etc.

The advantage of these is that they are slotted on one side, allowing fine adjustment.

### Specification

Aluminium, matt, anodised in natural colours

## T-bolts

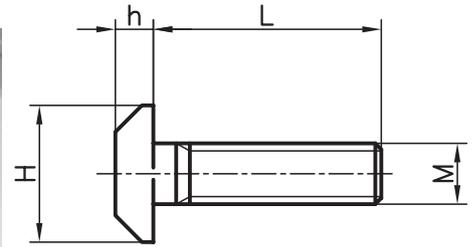

### Application

T-bolts are used to fasten all types of components and are simple to insert, even after assembly. The anti-twist shape is a help during assembly.

### Specification

8.8 steel, zinc-coated

### Scope of delivery

Screw, hexagonal nut, washer



### Order data

Order data							Order number				
A	B	C	D	E	S	Txt	Ø	Thread	Through-hole Ø	Thread M	
45	45	20	25	25	5	20x6.5	6.2	M6	A30-76	A30-86	
35	25	20	19	15	5	20x6.5	4.2	M4	A30-54	A30-64	
35	25	20	19	15	5	20x6.5	5.2	M5	A30-55	A30-65	
35	25	20	19	15	5	20x6.5	6.2	M6	A30-56	A30-66	
25	25	15	14	15	4	13.5x6	3.2	M3	B30-53	B30-63	
25	25	15	14	15	4	13.5x6	4.2	M4	B30-54	B30-64	
25	25	15	14	15	4	13.5x6	5.2	M5	B30-55	B30-65	
25	25	15	14	15	4	13.5x6	6.2	M6	B30-56	B30-66	

### Order data

Order data			Order number
MxL	H	h	
<b>Extrusion base 50/45</b>			
M8x20	18	5	A35-20
M8x25	18	5	A35-25
M8x30	18	5	A35-30
M8x40	18	5	A35-40
M8x60	18	5	A35-60
<b>Extrusion base 50/45/40</b>			
M6x18	18	5	C35-18
M6x25	18	5	C35-25
M6x30	18	5	C35-30
<b>Extrusion base 30</b>			
M6x15	13	4	B35-15
M6x20	13	4	B35-20
M6x30	13	4	B35-30
M6x40	13	4	B35-40

Further dimensions on request