



Hammer nuts

Base 50/45/40

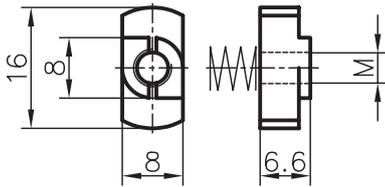

Base 30/20

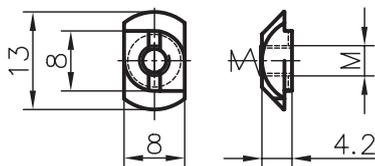

Application


The spring and rhomboid nuts can be used for the same purpose as the threaded plates and the extrusion nuts. They can be inserted into the extrusion slot after assembly. The nuts can be spaced close together because they are only 8 mm wide. However, their load-bearing capability is clearly lower than those of threaded plates and extrusion nuts.

Specification

Zinc-coated steel; retaining springs: spring steel



Rhomboid nuts

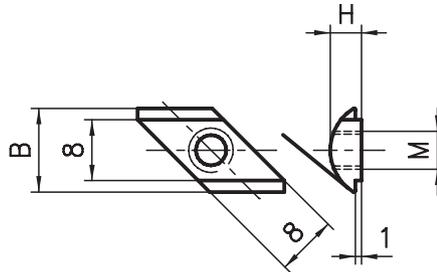

Measurement data


Extrusion base	B	H
50/45/40	13.6	5.9
30/20	11	4.1

Application

Zinc-coated steel



Anti-twist spigots



Application


For all extrusions which are assembled with a PVS connector and which must not twist. The spigot can also be fitted to existing extrusions (does not apply to 20x20 extrusions).

Specification

Zinc-coated steel

Parts supplied

Spigot, adjusting screw

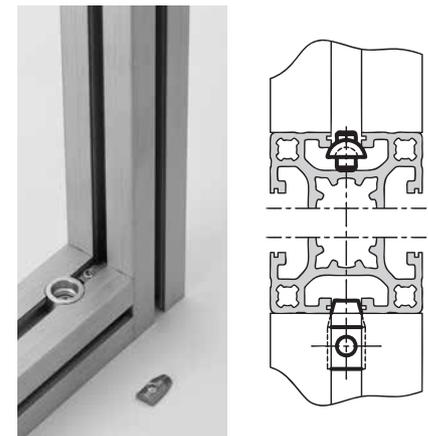

Order data	Order number	
	Extrusion base	
Thread M	50/45/40	30/20
M3	AC31-35	BD31-35
M4	AC31-45	BD31-45
M5	AC31-55	BD31-55
M6	AC31-65	BD31-65

Order data	Order number	
	Extrusion base	
Thread M	50/45/40	30/20
M3	-	BD31-30
M4	AC31-40	BD31-40
M5	AC31-50	BD31-50
M6	AC31-60	BD31-60

Order data	Order number	
	50/45/40	30/20
Spigot	AC29-00	BD29-00