

Cable duct connector

Application

The connectors are used to extend the cable ducts and create a 90° mitred connection (other angles on request). 2 connectors are required for the aluminium cable ducts 40x80 and 80x80. The threaded pins used to fix the ducts are included with the parts supplied.

Specification: zinc-coated steel
Adjusting screws: M5

Covering cap for front cover


Application

The covering cap is used to cover unnecessary openings on the front plates.

Cable passage to front cover

Application


This edge protection is used at places where cables need to be fed through the cable duct on the front face. Available for the relevant holes in the front covers.

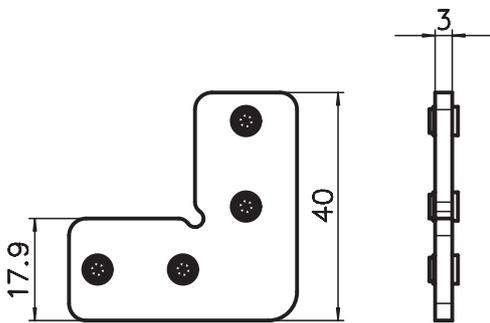


Connector, straight



Connector, 90°, other angles on request

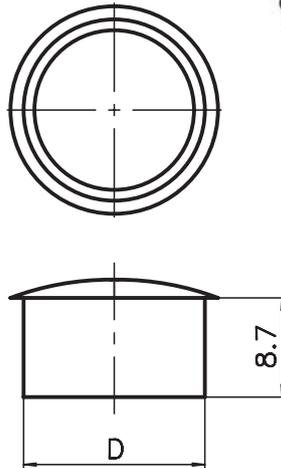

Plastic, black

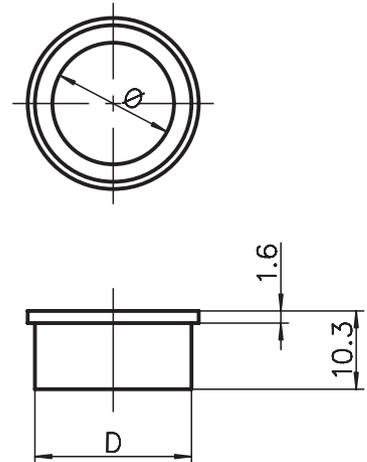

Plastic, black

Order data	Order number
Connector, 90°	C38-90
Connector, straight	C38-91

Order data	Order number
Ø 16	C38-46
Ø 20	C38-47

Order data	Order number
D= 16 Ø 12.7	C38-56
D= 20 Ø 16	C38-57