


Base extrusion 45x45 Type E01-1

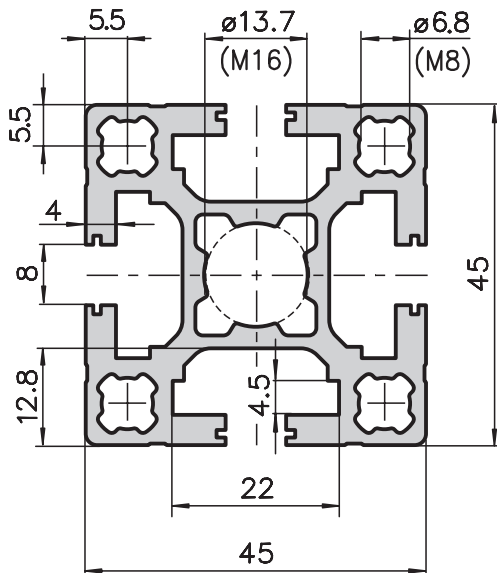

Application

The extrusions of base 45 are an ideal supplement to those of bases 20, 30, 40 and 50. The base extrusion 45x45 can be used for all types of constructions. It is exceptionally stable. It has an optimal weight and mechanical strength ratio.


Technical data

I_x, y	=	16.12 cm ⁴
W_x, y	=	7.16 cm ³
Cross-section area	=	7.68 cm ²
Weight	=	2.07 kg/m

Order data Order number

Base extrusion 45x45	
Standard length 5000 mm	E01-1-00/5000
Base extrusion 45x45	
Cut to length	E01-1-02-02/...
Extra machining	Pages 57-61

Face extrusion 45x45 Type E02-6

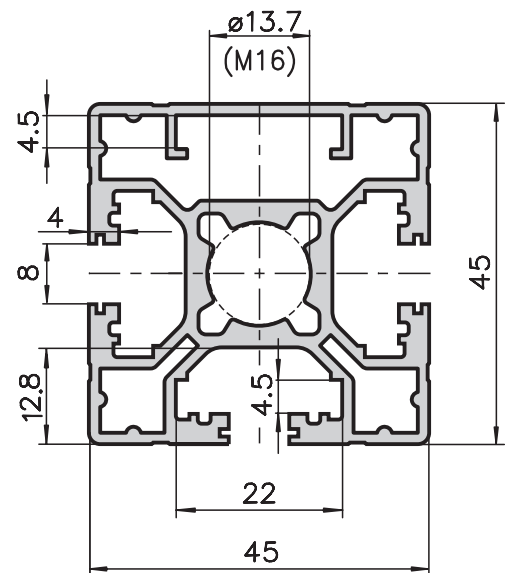

Application

As with the base extrusion, the face extrusion can also be used for a wide range of applications. They are distinguishable by having one closed side. This reduces possible dirt deposits and gives an optically smooth effect. Extrusions can also be fitted onto the closed faces.

Technical data

I_x	=	11.76 cm ⁴
I_y	=	12.20 cm ⁴
W_x	=	5.13 cm ³
W_y	=	5.42 cm ³
Cross-section area	=	5.77 cm ²
Weight	=	1.59 kg/m

Order data Order number

Face extrusion 45x45	
Standard length 5000 mm	E02-6-00/5000
Face extrusion 45x45	
Cut to length	E02-6-02-02/...
Extra machining	Pages 57-61

