



## Four sided softline extrusion 50x50 type A10-0

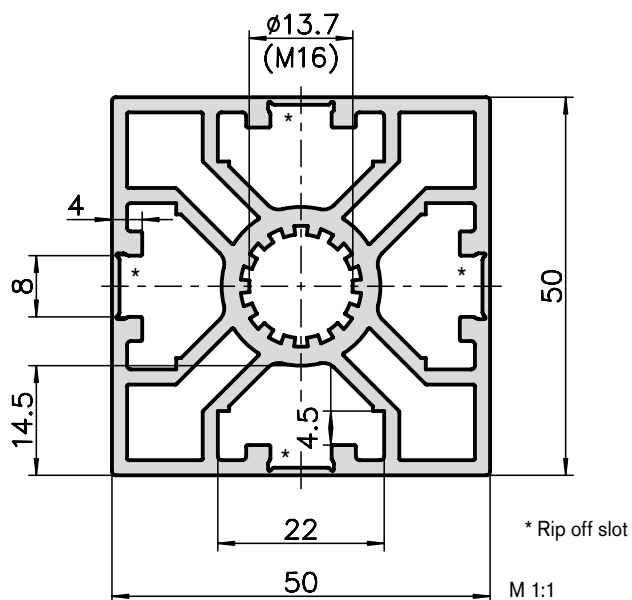

### Application

The 50 series Softline extrusion is used to create stable, attractive and easily washable constructions. Ideal for clean room applications. Due to the small curved corners, there are no dirt grooves with a T-connection. A very decorative extrusion which offers the designer many application possibilities whilst at the same time also being lightweight and inexpensive.

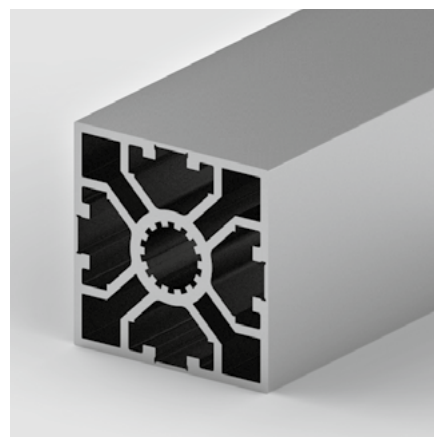

### Technical data

|                    |            |                       |
|--------------------|------------|-----------------------|
| $I_{x,y}$          | =          | 22.10 cm <sup>4</sup> |
| $W_{x,y}$          | =          | 8.22 cm <sup>3</sup>  |
| Cross-section area | =          | 8.38 cm <sup>2</sup>  |
| Weight             | =          | 2.4 kg/m              |
| Alloy              | EN AW-6060 |                       |

### Order data

### Order number

|                                     |                 |
|-------------------------------------|-----------------|
| Four sided softline extrusion 50x50 |                 |
| Standard length 5000 mm             | A10-0-5M        |
| Four sided softline extrusion 50x50 |                 |
| Cut to length                       | A10-0-02-02/... |
| Extra machining                     | Pages 43-47     |